


19/1000 Liner

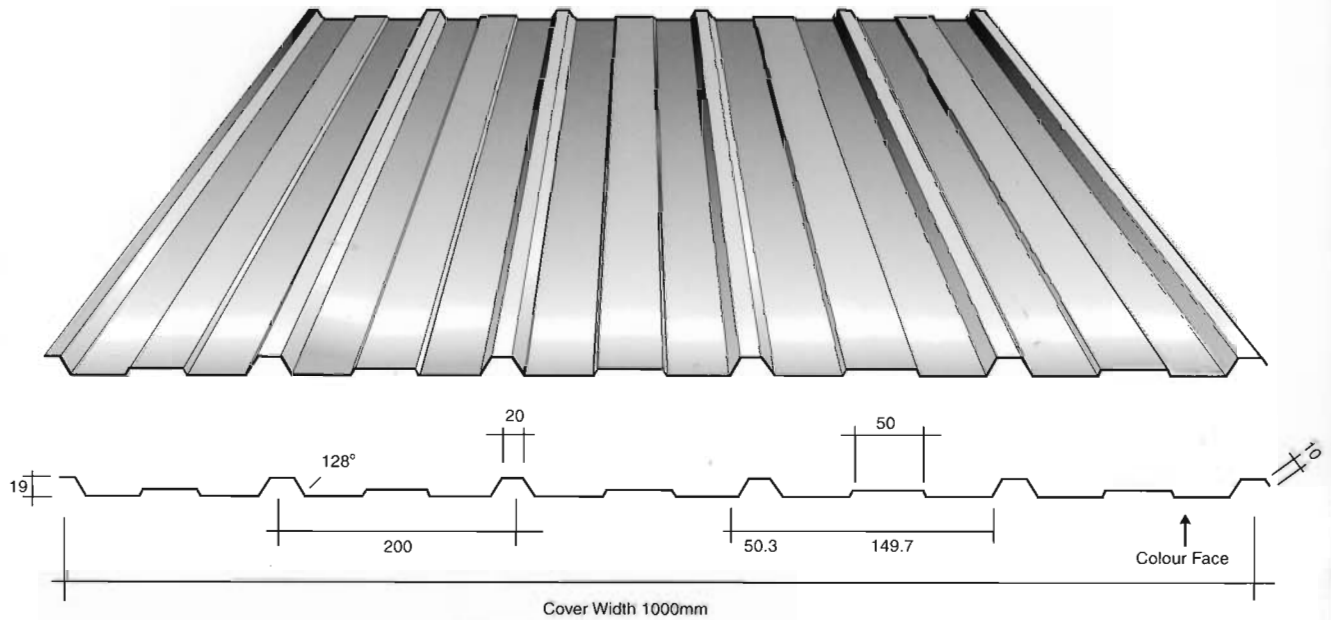

- An attractive white liner panel designed for both roof and wall lining.
- Designed to be used individually or in combination with other roof cladding materials to form a fully integrated system.
- Particularly suitable for soffits and light duty walls
- Can be curved or perforated for creativity in design.
- Full range of matching translucent panels

Table 1: Permissible downward (imposed) loads in kN/m² - deflection limit span/150
Span (mm)

Steel Thickness	Weight (kg/m ²)	Span Conditions	Span (mm)		
			1500	1800	2000
0.4mm	3.4	Single	0.48	0.31	0.21
		Double	0.46	0.34	0.26
		Multi	0.58	0.43	0.33
0.5mm	4.4	Single	0.77	0.50	0.34
		Double	0.81	0.59	0.45
		Multi	1.01	0.74	0.57
0.7mm	6.0	Single	1.03	0.65	0.44
		Double	1.23	0.90	0.69
		Multi	1.53	1.13	0.82

Table 2: Permissible wind uplift (negative) loads in kN/m² - deflection limit span/150
Span (mm)

Steel Thickness	Weight (kg/m ²)	Span Conditions	Span (mm)		
			1500	1800	2000
0.4mm	3.4	Single	0.39	0.25	0.17
		Double	0.49	0.36	0.28
		Multi	0.61	0.45	0.32
0.5mm	4.4	Single	0.62	0.40	0.27
		Double	0.82	0.60	0.46
		Multi	1.02	0.73	0.50
0.7mm	6.0	Single	0.86	0.56	0.38
		Double	1.19	0.87	0.67
		Multi	1.49	1.02	0.70