




C32/1000

Wall

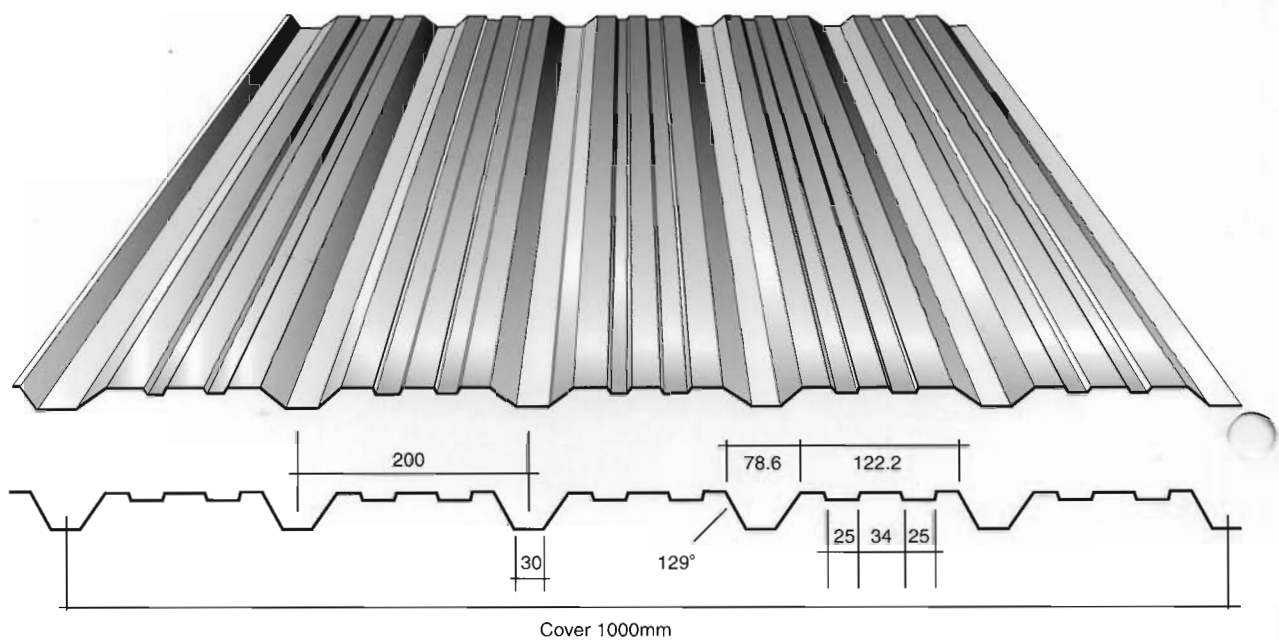

- An architecturally pleasing wall panel with invisible side lap.
- Suitable for horizontal and vertical applications - with or without cords.
- Choice of steel or aluminium in a wide range of colours and coatings.
- Designed to be used individually or combined with other materials to form a fully integrated system.
- Full range of matching translucent panels.

Permissible wind pressure (positive) loads in kN/m² - deflection limit span/150
Span (mm)

Steel Thickness	Weight kg/m ²	Span Conditions	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000
0.55mm	4.78	Single	5.14	3.49	2.52	1.91	1.49	1.10	0.82	-	-	-	-
		Double	2.83	2.08	1.60	1.27	1.04	0.86	-	-	-	-	-
		Multi	3.46	2.56	1.98	1.57	1.28	1.06	0.89	0.77	-	-	-
0.70mm	6.22	Single	7.49	5.08	3.68	2.78	2.03	1.46	1.09	0.83	-	-	-
		Double	4.59	3.38	2.59	2.05	1.67	1.38	1.17	0.99	0.86	-	-
		Multi	5.64	4.16	3.20	2.53	2.06	1.71	1.45	1.23	1.07	0.86	-
0.90mm	8.42	Single	11.35	7.70	5.57	4.02	2.79	2.01	1.50	1.14	0.89	-	-
		Double	7.15	5.20	3.95	3.11	2.50	2.06	1.71	1.44	1.22	1.05	0.90
		Multi	8.86	6.45	4.90	3.85	3.12	2.56	2.14	1.79	1.49	1.19	0.96

Permissible wind suction (negative) loads in kN/m² - deflection limit span/150
Span (mm)

Steel Thickness	Weight kg/m ²	Span Conditions	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000
0.55mm	4.78	Single	4.00	2.72	1.97	1.49	1.16	0.93	0.77	-	-	-	-
		Double	3.21	2.40	1.87	1.50	1.22	1.03	0.86	-	-	-	-
		Multi	3.90	2.92	2.28	1.82	1.50	1.25	1.01	0.91	0.79	-	-
0.70mm	6.22	Single	6.36	4.32	3.12	2.36	1.85	1.46	1.09	0.83	-	-	-
		Double	5.01	3.72	2.88	2.30	1.87	1.56	1.31	1.13	0.97	0.85	-
		Multi	6.12	4.56	3.53	2.82	2.30	1.92	1.62	1.38	1.09	0.86	-
0.90mm	8.42	Single	8.93	6.06	4.38	3.31	2.59	2.01	1.50	1.14	0.89	-	-
		Double	8.23	6.05	4.64	3.68	2.98	2.47	2.08	1.77	1.49	1.19	0.96
		Multi	10.11	7.45	5.73	4.54	3.69	3.05	2.49	1.91	1.49	1.19	0.96